

## Baylight<sup>®</sup> Prismatic Skylights

Provided by Behlen Building Systems



*Good Iron. GREAT Experience!<sup>™</sup>*

## Baylight is

- Domed to pick up more of the sun's rays and allow more light to be transmitted into the building
- Curb mounted
- Prismatic feature to refract sunlight into micro beams directed into the building's interior
- Acrylic so it doesn't yellow like fiberglass
- Available in double glaze
- Thermal break tape standard between frame and curb
- Mill finish standard (aluminum)

## Features

- Transmits 35% more light with superior light distribution
- Diffused 100% of the transmitted light
- Directs more of the transmitted light to the work plane
- Catches up to 20% more light at low sun angles
- 50% stronger than required by the Uniform Building Code
- Gives the quickest return on invested capital

## Benefits

- Every Baylight will more than pay for itself through reduced electrical bills
- Adding Baylight to 3-4% of the roof area allows electric lights to be shut off approximately 2,000 hours per year for regular work schedules.
- This saves 30% of lamp and ballast maintenance costs



## Considerations

- The advantage is not R-Value. The energy savings obtained by turning off the lights is greater than the heat or cooling use
- Daylighting rule of thumb is SFR (Skylight to Floor Ratio) should be approximately 3.5%
- Security screens are available

## Daylighting Requirements

- Warehouse 0-30 ft. candles
- Manufacturing 30-50 ft. candles
- Office 50-70 ft. candles
- Retail 75-100 ft. candles

### BAYLIGHT FRAME DESIGN

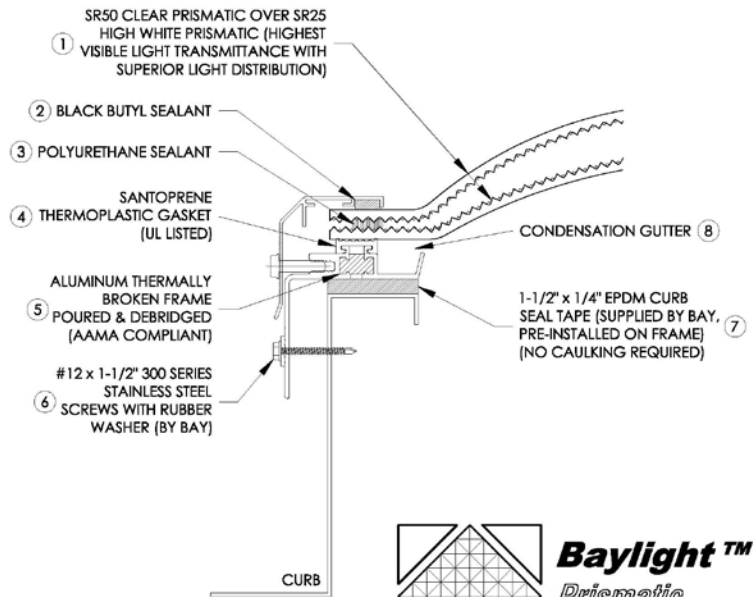

**Baylight™**  
Prismatic  
Skylights

Bay Insulation Systems  
2929 Walker Drive  
Green Bay, WI 54311  
800.442.8464 Toll Free  
[www.bayinsulationsystems.com](http://www.bayinsulationsystems.com)

To order, contact your Behlen Building Systems representative.

AD-20125 7-18



Look: [www.behlenbuildingsystems.com](http://www.behlenbuildingsystems.com) Call: 1.800.228.0340 Visit: 4025 E. 23rd St., Columbus, NE 68601